
KUSAM-MECO®
An ISO 9001:2015 Company

100MHz DIGITAL STORAGE OSCILLOSCOPE

Model - KM-DSO-2C10

THINK SAFETY
THINK KUSAM-MECO®

NEW

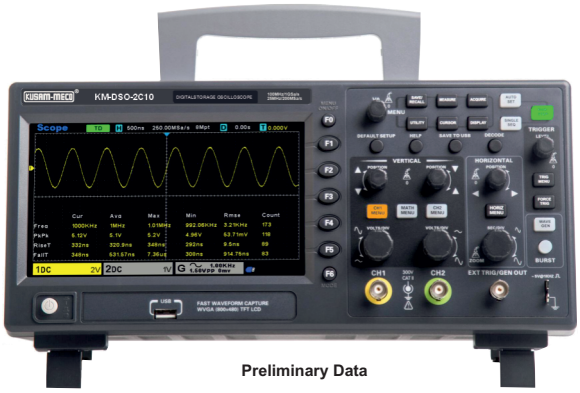

Preliminary Data

- ✶ **Display :** 7 inchs TFT (diagonal liquid crystal)
- ✶ **Display Resolution :** 800 (horizontal) * 480 (vertical) pixels
- ✶ **Display type :** Point, vector
- ✶ **Waveform brightness** : Adjustable
- ✶ **Grid type** : Optional
- ✶ **Grid brightness :** Adjustable
- ✶ **Screen brightness** : Adjustable
- ✶ **Persist** : 1s, 5s, 10s, 30s, infinite

✶ **SPECIFICATIONS :**

- Bandwidth : 100MHz
- Oscilloscope Channels : 2CH
- Waveform Generator : 1CH

- **Horizontal :**
  - SEC/DIV Range : 2ns/div to 100s/div, in a 1, 2, 5 sequence
- **Vertical:**
  - VOLTS/DIV Range : 2mV/div to 10V/div at input BNC
  - Low Frequency Response (-3db) ≤10Hz at BNC
  - Rise Time at BNC, typical : ≤3.5ns
- **Acquisition :**
  - Sample rate : 1GSa/s (single channel); 500MSa/s (two channels)
  - Equivalent sampling : 50GSa/s
  - Acquisition Modes : Normal, Peak, Average and High Resolution
- **Trigger:**
  - Mode : Auto, Normal, single
- **Edge Trigger :**
  - Slope : Rising, Falling, Rising&Falling
  - Source : CH1-CH2, Line, External
- **Pulse Trigger :**
  - Polarity : Positive, Negative
- **Video Trigger :**
  - Signal Standard : NTSC, PAL
- **Slope Trigger :**
  - Slope: Rising, Falling
- **Overtime Trigger :**
  - Source : CH1 - Ch2
- **Pattern Trigger :**
  - Pattern : 0: Lower level; 1: High level;
    X: Ignore; ⌋: Rise; ⌊: Fall; ⊥: Rise or fall.
- **Interval Trigger :**
  - Slope : Rising, Falling
- **Under Amp Trigger :**
  - Polarity Positive, Negative
- **UART Trigger :**
  - Condition :Start, Stop, Data, Parity Error, COM Error
- **LIN Trigger :**
  - Condition : Interval Field, Sync Field, Id field, Sync Id Error, Identifier, Id and Data
- **CAN Trigger :**
  - Condition : Start Bit, Remote Frame, Data Frame Id, Frame Id, DataFrame Id A, Error Frame, All Error, Ack Error, Overload Fram
- **SPI Trigger**
- **IIC Trigger**
- **Measurements**
- **Math Operation :**
  - Operator +, -, x, /, FFT
- **Storage :**
  - Save to external memory : CSV file, BMP picture (24 bit)

- **Input :**
  - Number of channels 2 analog channels
  - Input coupling : DC, AC, GND
  - Input impedance : 1MΩ±2% 20pF±3pF
  - Probe attenuation : 1X, 10X
  - Supported Probe Attenuation Factors: 1X, 10X, 100X, 1000X
  - Voltage rating : 300V CAT II
  - Maximum input voltage : 300VRMS (10X)
  - Isolation between channels >40dB
  - Delay deviation between channels <500ps
- **Trigger input signal source**
- **Probe compensator output**

✶ Interface : Standard interface USB Host, USB Device
✶ Power Consumption <15W
✶ **Power supply :** Voltage : 100-120VACRMS(±10%), 45Hz to 440Hz, CATII
120-240VACRMS(±10%), 45Hz to 66Hz, CAT II
✶ **Dimension :** Approx. 318(L) X 110(W) X 150(H)mm
✶ **Weight :** Approx. 1900g.
✶ **Accessories :** Passive Probe (1.5m, 10:1), Two Test Leads with two clips (built-in signal source); A Test Lead with two clips (no built-in signal source), Power cord, USB Cable, CD with Software & User Manual & Carrying Case.

All Specifications are subject to change without prior notice.

KUSAM-MECO®
An ISO 9001:2015 Company

Shop no.18, 1st Floor, CIDCO Shopping Complex, Plot # 9, Sector-7, Rajiv Gandhi Marg, Sanpada, Navi Mumbai - 400705.
Sales Direct : +91-9867488006, 9867675093 **Email :** sales@kusam-meco.co.in **Web.:** www.kusamelectrical.com