KUSAM-MECO®
An ISO 9001:2015 Company

BATTERY TESTER WITH PRINTER
Model- KM 950

THINK SAFETY
THINK KUSAM-MECO®

INTRODUCTION :

KM 950 battery Tester adopts the world's most advanced conductance test technology, which can conveniently, quickly & accurately measure the cold cranking current capacity & battery health of the vehicles battery without damaging the battery performance.

It has the ability to quickly detect the car common faults of cranking system & charging system.


Print test results through the built-in thermal printer



Preliminary Data



Thermal paper



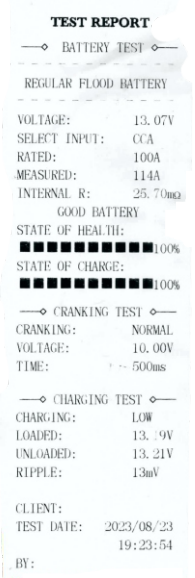
USB cable



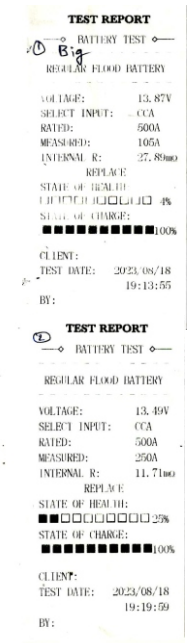
FEATURES :

- **12V & 24V Car Battery Analyzer with Printer**
- **Input Voltage Range : 8V ~ 30V**
- **Test 12V & 24V Cranking and Charging Systems**
- **Test Function Battery Resistance, Voltage, CCA, Health & Charge**
- **Cold Cranking Amps Measuring range :**
  1. DIN/IEC : 100~1400A
  2. JIS : 26A17~245H52
  3. CCA/BCI/CA/MCA/EN/SAE : 100~2000A
  4. GB : 30Ah-220Ah
- **Support :** 12V car Lead-acid battery (AGM, GEL, EFB)
- **Analysis result :** Good Battery, Good Recharge, Charge Retest, Replace Bad Cell & Replace Battery.
- **Auto save latest one time testing result**
- **Print out result directly (built in printer)**
- **Time Setting :** Sets the Time & Date
- **One-click function key:** shortcut for 2 quick function including voltmeter and quick test.
- **Protection of short-circuit and reverse connection elaborate.**
- **Test battery in & out of vehicle**
- **Dimension :** Approx. 232(L) * 106(W) * 62mm(H)
- **Printing Roll :** Approx. 57 x 50mm
- **Weight :** Approx. 800g
- **Accessories :** Thermal Paper (Consumable), USB Cable, Software CD, User Manual & Carrying case.

Good


TEST REPORT
BATTERY TEST
REGULAR FLOOD BATTERY
VOLTAGE: 13.07V
SELECT INPUT: CCA
RATED: 100A
MEASURED: 114A
INTERNAL R: 25.70mΩ
GOOD BATTERY
STATE OF HEALTH: 100%
STATE OF CHARGE: 100%
CRANKING TEST
CRANKING: NORMAL
VOLTAGE: 10.00V
TIME: 500ms
CHARGING TEST
CHARGING: LOW
LOADED: 13.19V
UNLOADED: 13.21V
RIPPLE: 13mV
CLIENT:
TEST DATE: 2023/08/23 19:23:54
BY:

Replace


TEST REPORT
BATTERY TEST
REGULAR FLOOD BATTERY
VOLTAGE: 13.87V
SELECT INPUT: CCA
RATED: 500A
MEASURED: 105A
INTERNAL R: 27.80mΩ
REPLACE
STATE OF HEALTH: 4%
STATE OF CHARGE: 100%
CLIENT:
TEST DATE: 2023/08/18 19:13:55
BY:
TEST REPORT
BATTERY TEST
REGULAR FLOOD BATTERY
VOLTAGE: 13.49V
SELECT INPUT: CCA
RATED: 500A
MEASURED: 250A
INTERNAL R: 11.71mΩ
REPLACE
STATE OF HEALTH: 25%
STATE OF CHARGE: 100%
CLIENT:
TEST DATE: 2023/08/18 19:19:59
BY:

All Specifications are subject to change without prior notice.

KUSAM-MECO®
An ISO 9001:2015 Company

Shop no.18, 1st Floor, CIDCO Shopping Complex, Plot # 9, Sector-7, Rajiv Gandhi Marg, Sanpada, Navi Mumbai - 400705. **Sales Direct :** +91-9867488006, 9867675093
Email : sales@kusam-meco.co.in **Web.:** www.kusamelectrical.com